



# Technical Data — LLB-02WR-01-00

**CCFL  
WHITE/RED  
10-30VDC**

## Advantage

- ◆ High Output White AND Red Lights
- ◆ Independant built-in dimming for both white & red
- ◆ Super Slim Design
- ◆ Replaceable tubes (not that you will need to)
- ◆ Input Voltage: 10-30VDC
- ◆ 30,000 hour tube liver vs 6,000 standard
- ◆ Flush Mountable (no hole required)
- ◆ Application: Marine, Auto, Home



## Specif cation

### WHITE

Voltage	Current (ma)	Output (lumens)	Kelvin	Purity	CRI
9	1040	101	4122	18	83.9
10	910	100	4108	18	84.1
11	825	100	4103	18	84.1
12	760	100	4101	18	84
13	695	100	4081	18	84.1
14	645	99	4091	18	84
15	605	99	4088	18	84
16	570	99	4091	18	83.9

### RED




Voltage	Current (ma)	Output (lumens)	Wavelength
9	950	19	613
10	1110	22	613
11	960	23	613
12	860	23	613
13	780	23	613
14	715	23	613
15	665	24	613
16	620	24	613

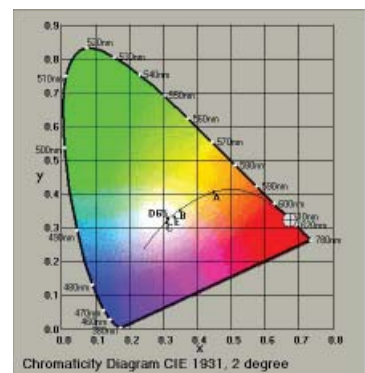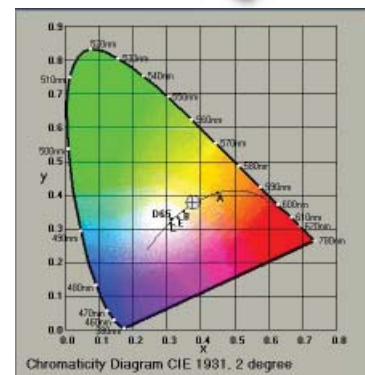

9619 W. Yulee Drive, Homosassa, FL 34448  
 352-417-0009 Fax 352-621-5212  
[www.lunasea.com](http://www.lunasea.com)



All systems are certified our calibration laboratory team with extensive experience in performing application specific calibrations, all of which are traceable to the National Institute of Standards and Technologies, NIST

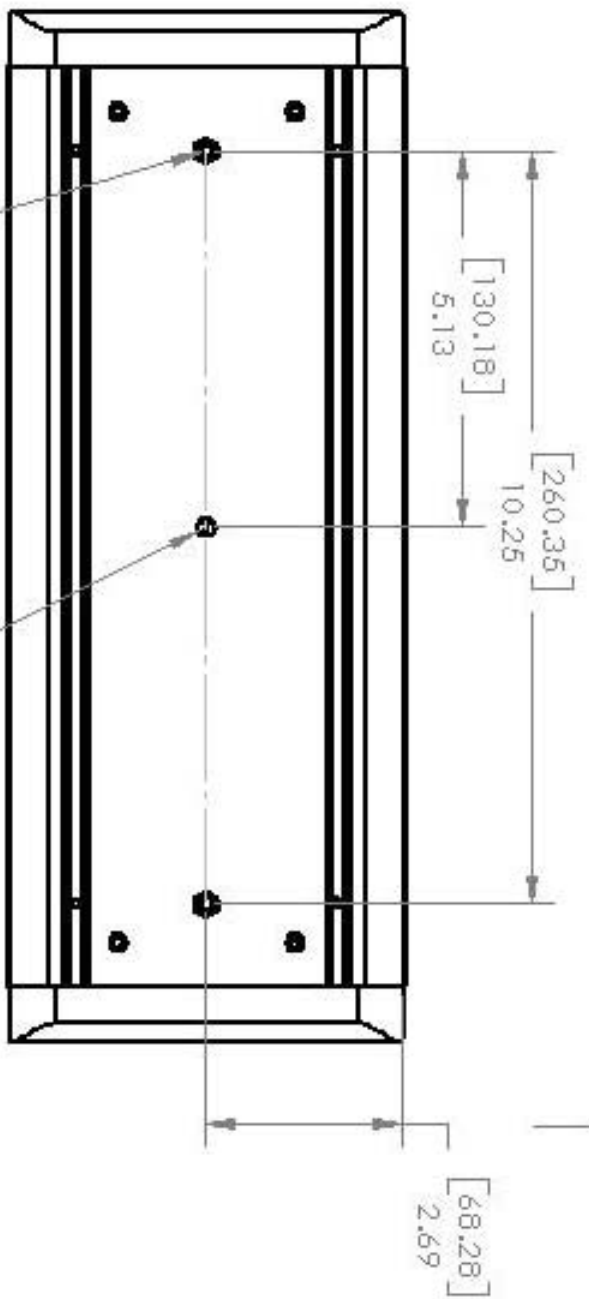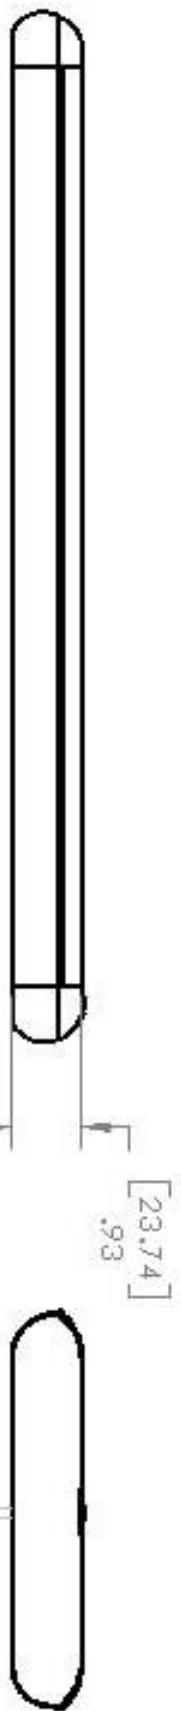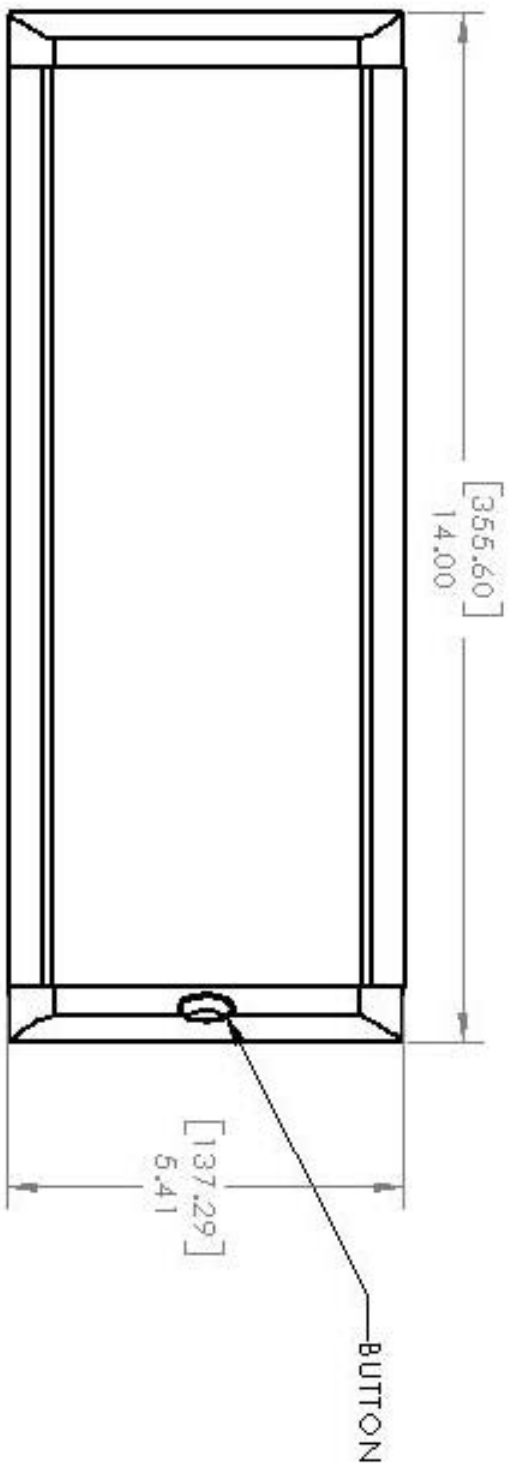

LL02 LAMP

MECHANICAL SPECIFICATIONS  
 UNITS = [MM]  
 INCHES